



Project:

Location:

Fixture Type:

Catalog Number:

**AVAILABLE FINISHES:**



# Zenith

FM-5415

**PRODUCT DESCRIPTION**

This diffused, simple, low-profile 15-inch flush mount fixture that is unassuming yet packed with the latest in LED technology. Specify your color temperature for a project and have the flexibility to select your own in the field with the on-board CCT selection switch. For longer commercial corridors, utilize the unique construction of this flush mount to allow you to seamlessly add in emergency battery backup units, without breaking the size symmetry between fixtures.

**FEATURES**


- Driver concealed within the fixture
- Multiple LED array for uniform illumination
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K/5000K
- Emergency battery backup option available (special order).

**SPECIFICATIONS**

Rated Life	50000 Hours
Standards	Energy Star 2.0, Wet Location Listed, Title 24 JA8: 2019 Compliant
Input	120-277v
Dimming	TRIAC: 100-10%
Mounting	Can be mounted on ceiling or wall in all orientations
Color Temp	2700K, 3000K, 3500K, 4000K, 5000K
CRI	90
Construction	Aluminum body with acrylic diffuser

**REPLACEMENT PARTS**

RPL-SHA-5415 - Shade

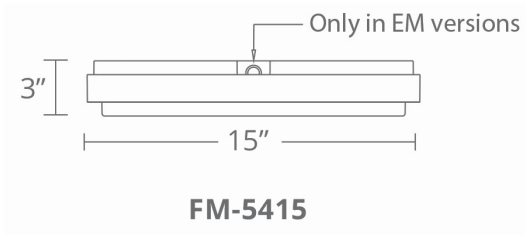

**FM-5415**

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
FM-5415 15"	2700K	TT Titanium	26W	2150	1663
	2700K	TT Titanium	26W	2150	1663
	3000K	TT Titanium	26W	2150	1698
	3000K	TT Titanium	26W	2150	1698
	3500K	TT Titanium	25.9W	2150	1739
	3500K	TT Titanium	25.9W	2150	1739
	4000K	TT Titanium	25.8W	2150	1778
	4000K	TT Titanium	25.8W	2150	1778
	5000K	TT Titanium	25.9W	2150	1818
	5000K	TT Titanium	25.8W	2150	1818

Example: **FM-5415-50-TT-EM**

•For emergency battery backup option, add -EM after the finish FM-5415-27-TT-EM